




Indoff, Inc.
 Selling Nationwide
 ahutton@ahutton.com
 (860) 632-2026
 Fax: (860) 632-2028
 www.ahutton.com

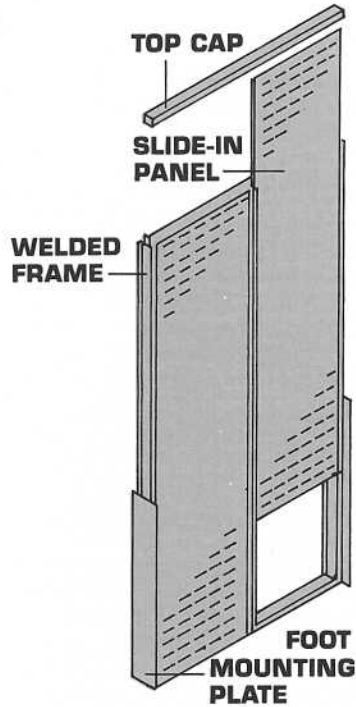

SINGLE TIER RACKING Single Tier Racking is ideal for joining together to form single tier installations, but is not designed to provide the structural support required for extended height or multi-level use. This racking supports the full range of Linvar containers and accessories at their rated load capacities and offers substantial cost savings over the heavier duty Freestanding Racks. It is available in 36 and 54 inch widths and in three heights, in both single and double-sided units.

Single tier racking part numbers below DO NOT INCLUDE RACKING FEET, which must be ordered separately by referring to "Single Tier Racking Feet" at the bottom of this page.

Single-sided and double-sided part numbers on the table below include both frame and louvered panels. To permit distributors to draw from existing inventory of louvered panels, we have also included part numbers for "Frames Only."

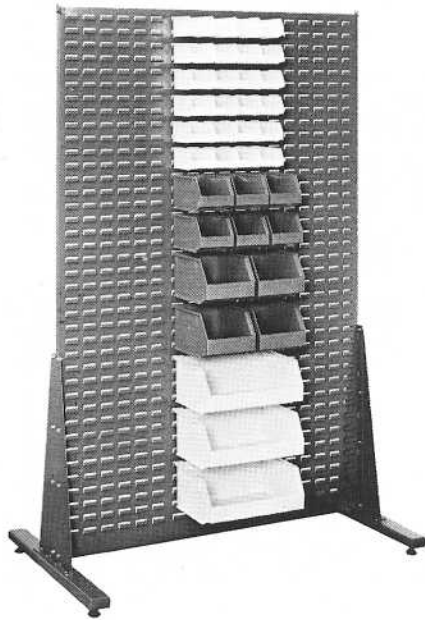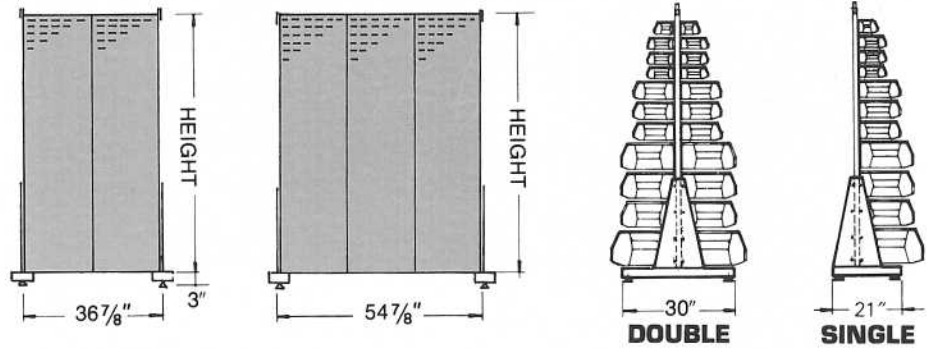

SINGLE TIER RACKING		36" WIDE			54" WIDE		
NOMNL. HEIGHT	TYPE OF UNIT	LBU	LOAD CAPACITY	PART NUMBER	LBU	LOAD CAPACITY	PART NUMBER
4'6"	Single-sided	104	1,000 lb.	38-006	156	1,500 lb.	38-004*
	Double-sided	208	2,000 lb.	38-005			38-003*
	Frame only			38-056			38-034*
6'0"	Single-sided	136	1,200 lb.	38-010*	204	1,600 lb.	38-008
	Double-sided	272	2,400 lb.	38-009*			38-007
	Frame only			38-1009*			38-078
7'0"	Single-sided	160	1,300 lb.	38-014	240	1,800 lb.	38-012*
	Double-sided	320	2,600 lb.	38-013			38-011*
	Frame only			38-1314			38-1112*


NOTE: Shipped K.D. with assembly instructions.

SINGLE TIER RACKING FEET

Two types of racking feet are available: one for single-sided and one for double-sided racking. Each foot is complete with level adjusters to compensate for uneven floors.

Single Tier Racking, a foot is required at each end of the first rack (starter) in each row and one foot for each additional rack (adder). (Two frames require 3 feet, 3 frames require 4 feet, etc.) See the drawing below. Each stand-alone unit requires 2 feet.

When forming continuous rows of

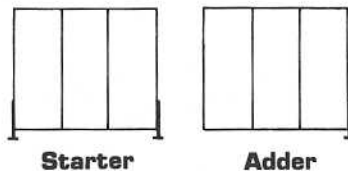

SINGLE TIER RACKING FEET	
TYPE OF RACK	PART NUMBER
Single-sided	38-001*
Double-sided	38-002*

